

# VEROLITE<sup>™</sup> FURNITURE GRADE POLYCARBONATE SHEET

# PRODUCT DATASHEET

#### DESCRIPTION

VEROLITE<sup>TM</sup> Furniture sheet grades are high quality, multi-wall polycarbonate glazing sheets extruded from LEXAN<sup>TM</sup> resin. The complete range offers remarkable impact strength, high light transmission, light weight which is due to the multi-wall construction and outstanding thermal insulation properties. VEROLITE<sup>TM</sup> Furniture sheet grades are specifically designed for use in interior applications only. VEROLITE Furniture sheet grades are only available in clear colour.

#### TYPICAL PROPERTY VALUES\*

| GRADE<br>(Non UV) | GAUGE<br>Inches | GAUGE<br>mm | WEIGHT<br>lb/ft² | WEIGHT<br>kg/m² | COLOUR      | <sup>†</sup> SOUND<br>REDUCTION<br>DB | ^ U VALUE<br>BTU∕ hr ft² ⁰F | ^U VALUE<br>W/m² K | ¶ IMPACT<br>TEST<br>GARDNER |
|-------------------|-----------------|-------------|------------------|-----------------|-------------|---------------------------------------|-----------------------------|--------------------|-----------------------------|
| VUH0613           | 0.236           | 6           | 0.266            | 1.3             | Clear – 112 | 17                                    | 0.627                       | 3.56               | >72                         |
| VUH0817           | 0.315           | 8           | 0.348            | 1.7             | Clear – 112 | 18                                    | 0.574                       | 3.26               | >72                         |
| VUH1020           | 0.394           | 10          | 0.409            | 2.0             | Clear - 112 | 19                                    | 0.532                       | 3.02               | >72                         |

## LIGHT TRANSMISSION STANDARD COLOR

| GRADE<br>(Non UV) | COLOUR      | LT <sup>•</sup> D65<br>% | DST <sup>#</sup> % | TST⁺<br>% | SHGC <sup>#</sup> | LSGR <sup>#</sup> | $SC^{\#}$ |
|-------------------|-------------|--------------------------|--------------------|-----------|-------------------|-------------------|-----------|
| VUH0613           | Clear – 112 | 82                       | 76                 | 82        | 0.82              | 1.00              | 0.94      |
| VUH0817           | Clear – 112 | 81                       | 77                 | 82        | 0.82              | 0.99              | 0.94      |
| VUH1020           | Clear - 112 | 81                       | 76                 | 80        | 0.80              | 1.01              | 0.92      |

These property values have been derived from LEXAN<sup>™</sup> resin data for the material used to produce this sheet product.

<sup>†</sup> Sound reduction value based on SABIC calculated values according DIN 52210-75

U-values based on SABIC calculated values according ISO 10077 (EN673)

Impact test using Gardner Impact method ASTM D4226, D5420, D5628

\* LT (Light Transmission) and TST (Total Solar Transmission) measurements according ISO 9050 (EN 410) on 600x600 mm samples.

<sup>#</sup> TST (Total Solar Transmission) divided by 100 equals Solar Heat Gain Coefficient (SHGC) or g-value.

™ Trademarks of SABIC.

## DEFINITIONS

## SOLAR TRANSMISSION

VEROLITE Furniture sheet grades have excellent light transmission. Although VEROLITE Furniture sheet grades have less solar transmission versus traditional glass.

#### WARRANTY

SABIC offers a Ten (10) Year Limited Written Warranty on VEROLITE Furniture sheet grades covering breakage. For detailed information, please contact your local SABIC Service Center or authorized distributor.

#### THERMAL INSULATION

The multi-wall structure of VEROLITE<sup>™</sup> sheet offers significant advantages where thermal insulation is a major consideration. The hollow form provides excellent insulation characteristics with heat losses significantly lower than monowalls glazing materials.

#### FIRE TEST PERFORMANCE

VEROLITE Furniture sheet grades have good fire behavior characteristics, with a CC1 and Class A rating according to ASTM D635 and E84 testing respectively. More detailed information is available from your local SABIC service Center or authorized distributor.


#### SOUND INSULATION

The sound insulation characteristics of a material are largely pre-determined by its stiffness, mass and physical construction. According to DIN 52210-75, the maximum obtainable sound is 21dB.

#### **IMPACT STRENGTH**

VEROLITE Furniture sheet grades have outstanding impact performance over a wide temperature range, -40°F to 248°F, (-40°C to 120°C) and also after prolonged outdoor exposure.

## STRUCTURES AND NOMENCLATURES

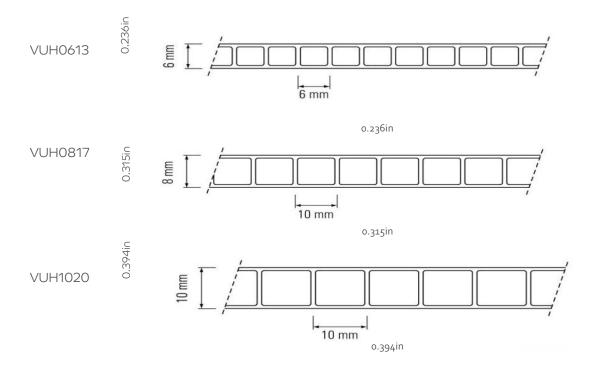

#### GENERAL GUIDELINES

#### STORAGE

VEROLITE™ Furniture sheet grades should be stored and protected against atmospheric influences like sun, rain, etc. Care should be exercised when handling and transporting VEROLITE Furniture sheet grades in order to prevent scratches on the panel surface and damage to the panel edges.

#### CLEANING

SABIC recommends cleaning surfaces with lukewarm water, using a soft sponge and a solution of mild soap. Do not use any corrosive materials or chemicals to clean VEROLITE Furniture sheet grades. Using any other cleaning agents than the recommended one must have the prior approval of SABIC in order to validate the VEROLITE sheet warranty.

#### CHEMICAL RESISTANCE

Neoprene, EPT or EPDM rubbers with an approximate Shore Hardness of A65 are recommended. When using glazing compounds it is essential that the sealant system accepts a certain amount of movement to allow for thermal expansion, without loss of adhesion to the frame or sheet. Silicone sealants are generally recommended for use with VEROLITE Furniture sheet grades. It is strongly advised when using sealing to check compatibility before use.

#### SAWING

VEROLITE Furniture sheet grades can be cut easily and accurately with standard workshop equipment. This includes common circular, hand and hacksaws. Saw dust should be blown out of the channels using clean compressed air. Circular saw blade should be fine-toothed panel blades. When hand or power hacksaws are used, the sheet should be clamped to the worktable to avoid undesirable vibration.

#### THERMAL EXPANSION ALLOWANCE

Since VEROLITE Furniture sheet grades has a greater linear thermal expansion coefficient than that of traditional glazing materials, care should be taken to allow for free expansion of the sheet to prevent bowing and internal thermal stress. Thermal expansion allowance must be made for both the length and width of the VEROLITE Furniture sheet grades. In general, thermal expansion of the sheet is approximately 0.036in per linear foot or 3mm per linear meter.

#### SAFETY

The processing guidance given in this documentation is given in good faith and the trust that in all cases you wear the correct Personal Protective Equipment (PPE), e.g. helmet, proper gloves, safety goggles etc. to safely fabricate, e.g. (but not limited to) sawing, cutting, forming our sheets and films. In all cases you should follow local and national regulations around the wear of PPE's prescribed or mandatory to perform these tasks in a safely manor.

## CONTACT US:

#### SABIC CORPORATE HQ

PO Box 5101 Riyadh 11422 Saudi Arabia T +966 (0) 1 225 8000 F +966 (0) 1 225 9000 E info@sabic.com

#### AMERICAS

Functional Forms 2500 City West Boulevard Suite 100 Houston, TX 77042 USA Toll-free (800) 323 3783 F (888) 443 2033 E spinside.sales@sabic.com

#### EUROPE

Functional Forms Plasticslaan 1 4612 PX Bergen op Zoom The Netherlands T +31 (0)164 293678 F +31 (0)164 293272 E ff.info@sabic.com

#### PACIFIC

Functional Forms 2550 Xiupu Road Pudong 201319 Shanghai China T +86 20 2866 6168 E ff.info@sabic.com



DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right. SABIC and brands marked with ™ are trademarks of SABIC or its subsidiaries or affiliates, unless otherwise noted.

© 2022 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.