

LEXAN™ XL102UV SHEET

PRODUCT DATASHEET

DESCRIPTION

LEXAN XL102UV sheet combines the impact strength of LEXAN polycarbonate sheet with a proprietary UV-resistant surface treatment on both sides that protects it from weathering. LEXAN XL102UV sheet is the only polycarbonate glazing material backed by a ten-year limited warranty against yellowing, loss of light transmission and breakage#. Providing long-lasting clarity over a wide range of weather conditions and environments, Lexan XL102UV sheet improves service life and reduces life-cycle material costs. Lexan XL102UV sheet is well suited for all types of vertical glazing and overhead applications such as skylights, covered walkways and barrel vaults.

TYPICAL PROPERTY VALUES

PROPERTIES	TEST METHOD	VALUE	UNIT
PHYSICAL			
Specific Gravity	ASTM D792	1.20	-
Sound Transmission STC Rating (36" x 84")			
@ 0.118"	ASTM E9070	25	
@ 0.177"		29	
@ 0.236"		31	
Light Transmission (Average)	ASTM D1003	88	%
Rockwell Hardness	ASTM D785	M70/ R118	-
Chemical Resistance	ANSI Z26.1	Passes	
MECHANICAL			
Tensile Strength @ Yield	ASTM D638	9,300	psi
Tensile Modulus	ASTM D638	345,000	psi
Flexural Strength	ASTM D790	14,000	psi
Flexural Modulus	ASTM D790	360,000	psi
Flexural Endurance @ 1,800 Cycles/Min, 73°F, 50% RH	ASTM D671	1,000	psi
Compression Strength @ yield	ASTM D695	10,400	psi
Elongation	ASTM D638	85	%
Izod Impact Strength, up to 125 mils, Notched Drop	ASTM D256A	12-18	ft-lbs-in
Dart Impact Strength, 1" dia. Dart @ 73°F @ 0°F	SABIC Method	>200 >200	ft-lbs
THERMAL			
Coefficient of Thermal Expansion	ASTM D696	3.75 x10-5	in/in/°F
Thermal Shrinkage	SABIC Test	1	%
Heat Deflection Temperature @ 264 psi @ 66 psi	ASTM D648		°F °F
Shading Coefficient	ASHRAE	280	-
Clear		1.02	-
Grey/ Bronze		.79	-

FLAMMABILITY

Horizontal Burn (Flame Spread), AEB	ASTM D635	<1	in
Ignition Temperature Flash	ASTM D1929	873	
Self		1,076	°F

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC representative.

CODE COMPLIANCE

UL File Number: E121562

ENERGY EFFICIENCY

LEXAN XL102UV sheet provides up to 25% better thermal insulation than single-panel glass. Double glazing increases the advantage.

PRODUCT AVAILABILITY

Standard Gauges and Widths

0.118", 0.150", 0.177", 0.236" in 4'x8', 6'x8' and 8'x8'

Product can be made within the gauge range of 0.093"-0.500'

Standard Colors: 112

Product can be made with other colors


IMPACT RESISTANCE ¶

¼" LEXAN XL102UV sheet

¼" Acrylic

¼" Tempered Glass

¼" Laminated Glass

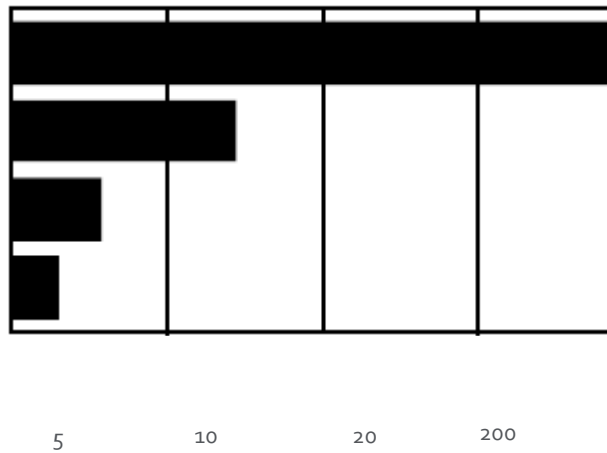

¶) Drop Dart Test with a 5-lb steel dart and a 1" diameter tip.

Measured in foot-pounds

CHEMICAL RESISTANCE

LEXAN XL102UV sheet has sufficient resistance to most mineral oils, greases, aliphatic hydrocarbons and acids under low or moderate stress levels. Specific (application related) testing is always advised, especially in applications where the LEXAN XL102UV sheet will come into contact with aggressive chemicals.

PROCESSING

LEXAN XL102UV sheet can be used for thermoforming. It offers high, deep draw ratios, equal wall thickness distribution, and it can be formed into complex shapes using standard thermoforming equipment. Sandwich type heating systems give the best results. LEXAN XL102UV sheet has a forming temperature range of 350– 400°F. When forming, a draft angle of at least 3° should be allowed, and post mold shrinkage of 0.007– 0.009 in/in taken into account.

PRE-DRYING

It is important to ensure that LEXAN XL102UV sheet is free of moisture prior to thermoforming. A hot air circulating oven set at 250°F is recommended. Pre-drying times vary from 3–24 hours, depending on sheet thickness.

ASSEMBLING / PAINTING

Parts made from LEXANTM XL102UV sheet can be assembled with plastics, metals, rubber and other materials using many types of adhesive bonding, welding and mechanical fastening techniques. Since some of these materials can cause environmental stress cracking, please consult SABIC, for advice on specific applications. A list of approved paint systems and suppliers is available upon request.

CONTACT US:

SABIC CORPORATE HQ

PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

AMERICAS

SABIC
Functional Forms
2500 City West Boulevard
Suite 100
Houston, TX 77042
USA
Toll-free (800) 323 3783
F (888) 443 2033
E spinside.sales@sabic.com

EUROPE

SABIC
Functional Forms
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293684
F +31 (0)164 292272
E ff.info@sabic.com

PACIFIC

SABIC
Functional Forms
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 3222 4500
F +86 21 6289 8998
E ff.info@sabic.com

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with ™ are trademarks of SABIC or affiliates.
© Copyright 2021. All rights reserved.

† Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

