

LEXAN™ MR101LG SHEET

PRODUCT DATASHEET

DESCRIPTION

One Side Coated Mar/UV-resistant LEXAN™ MR101LG sheet combines the impact strength of LEXAN polycarbonate sheet with a proprietary abrasion/UV resistant surface that approaches glass in performance. LEXAN MR101LG Sheet with MARGARD™ coating is the only Polycarbonate material backed by a ten-year limited warranty against yellowing, abrasion resistance, breakage, loss of light transmission, and coating failure. LEXAN MR101LG One Side Hard Coated Sheet is a great candidate for all Lamination Applications. Our unique coating is graffiti-resistant enabling restoration to a like-new condition. In addition, LEXAN MR101LG sheet offers improved resistance to weathering as well as forced entry protection. It is well-suited for use in stores, public buildings, schools, bus shelters and other high traffic areas. LEXAN MR101LG sheet is for transparent applications only. Because of its high mar-resistant surface, paint, adhesives and other materials will not adhere to its surface. Due to its mar-resistant coating, LEXAN MR101LG sheet cannot be cold-formed. For Transportation Applications please order MR101LGT with ripple orientation.

TYPICAL PROPERTY VALUES ◆

PROPERTY	TEST METHOD	UNITS	VALUE
Physical			
Specific Gravity	ASTM D792	-	1.20
Light Transmission (Average), 1/8" Thick	ASTM D1003	%	88
Chemical Resistance	ANSI Z26.1	-	Passes#
Mechanical			
Tensile Strength, Ultimate	ASTM D638	psi	9,500
Flexural Strength	ASTM D790	psi	13,500
Flexural Endurance @ 1,800 Cycles/Min, 73°F, 50% RH	ASTM D671	psi	1,000
Compressive Strength	ASTM D696	psi	12,500
Modulus of Elasticity	ASTM D638	psi	345,000
Drop Ball Impact Strength‡	SABIC Test	ft-lbs	
@ 73°F			>200
@ 32°F			>200
@ 0°F			>200
Thermal			
Coefficient of Thermal Expansion	ASTM D696	in/in/°F	3.75 x10 ⁻⁵
Heat Deflection Temperature @ 264 psi	ASTM D648	°F	260
Flammability			
Horizontal Burn (Flame Spread)	ASTM D635	in	
AEB			<1
Ignition Temperature	ASTM D1929	°F	
Flash			873
Self			1,076

◆ These typical values are not intended for specification purposes. If minimum certifiable properties are required please contact your local SABIC Innovative Plastics' representative.

‡ 5-lb steel ball dropped from a height of 40 feet

™ Trademarks of SABIC.

£ Request details of limited ten-year warranty plus cleaning and maintenance instructions.

[UL File Number: E121562](#)


ABRASION RESISTANCE COMPARISON

LEXAN MR101LG sheet exhibits significantly less hazing than uncoated polycarbonate sheet as shown in the abrasion resistance chart.

	Test Method	Uncoated Polycarbonate	% HAZE LEXAN MR10 Sheet	Glass
TABER ABRASION 100 CYCLES CS 10F	ASTM D1044 Z26.1	35.0	1-3	0.5

‡ The Taber Abrader test measures the percent of change in haze that results from the grinding action of two abrasive impregnated wheels on the test samples. A constant load of 500 grams is maintained as the samples rotate on a turntable for a predetermined number of revolutions.

IMPACT RESISTANCE

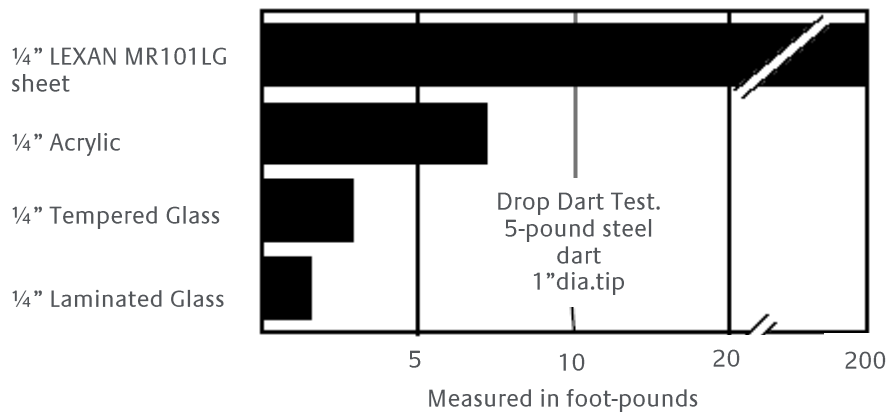

CODE COMPLIANCE

LEXAN MR101LG sheet meets the requirements of all major model building codes

- Model Building Code Organizations** The Approved Light Transmitting Plastics requirements set by the three major Model Building Code organizations (BOCA, ICBO, and SBCCI) and Dade County. LEXAN MR101LG sheet meets the highest rating—Class CC1 Approved Plastic.
- Underwriters Laboratories** LEXAN MR101LG sheet is listed as a Burglary-Resisting Glazing Material according to UL Standard 972.
- CPSC: 16 CFR 1201, I, II** LEXAN MR101LG sheet complies with the Consumer Product Safety Commission's Safety Standard for architectural glazing materials for both Category I and Category II applications.

CONTACT US:

Middle East and Africa

SABIC Global Headquarters
PO Box 5101
Riyadh 11422
Saudi Arabia
T +966 (0) 1 225 8000
F +966 (0) 1 225 9000
E info@sabic.com

Email

sfs.info@sabic-ip.com

Americas

Specialty Film & Sheet
1 Plastics Avenue
Pittsfield, MA 01201
USA
Toll-free 1 800 323 3783
T 1 413 448 6655
F (888) 443 2033
E Spinside.sales@sabic-ip.com

Europe

Specialty Film & Sheet
Plasticslaan 1
4612 PX
Bergen op Zoom
The Netherlands
T +31 (0)164 293678
F +31 (0)164 293272
E sfs.info@sabic-ip.com

Asia Pacific

Specialty Film & Sheet
2550 Xiupu Road
Pudong
201319 Shanghai
China
T +86 21 2037 8188
F +86 21 2037 8288
E sfs.info@sabic-ip.com

DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with TM are trademarks of SABIC or its subsidiaries or affiliates.
© 2014 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.

[†] Any brands, products or services of other companies referenced in this document are the trademarks, service marks and/or trade names of their respective holders.

www.sabic.com/sfs

